

TRUCK, UTILITY, LIGHTWEIGHT, MC 2 - LAND ROVER 110 - ALL TYPES
TRUCK, CARGO, LIGHT, MC2 - LAND ROVER 110 - ALL TYPES

FITTING OF SPOT MIRRORS

MODIFICATION INSTRUCTION

Issue of this instruction is authorised by CONMEA.

Introduction

1. This instruction details the fitting of 3 inch spot mirrors to the existing, external rear view mirror assemblies. Spot mirrors as detailed in EMEI VEH A 597-5 are NOT to be fitted to Land Rover 110 variants.

Note:

1. NSN and Designation used in this instruction were current at the date of issue. If twelve months or more have expired since issue, the NSN should be checked for supersession.

General

2. Estimated Modification Time. 0.15 hrs.
3. Priority. Group 2.
4. Modification to be Applied to. All subject vehicles.
5. Items Affected. Mirror Assembly.
6. Action Required. By RAEME units authorised to carry out unit, field and base repairs.

TABLE 1 - STORES REQUIRED (To be demanded through normal supply channels, from Moorebank Logistic Group)

Item	NSN	Designation	Qty per Equip
(a)	(b)	(c)	(d)
1.	2540-66-135-0374	Mirror Assembly, rearview circular, convex, 3" DIA	2

Detail

7. The modification is to be completed in the sequence as described below:
 - a. Clean both mirror assemblies, ensuring that all oil/road grime has been removed.
 - b. Remove the adhesive protective film on the rear of the spot mirrors and secure in the outer lower corner of each existing external rear view mirror assembly, as shown in Fig 1 (left hand side shown only).

UNCONTROLLED WHEN PRINTED

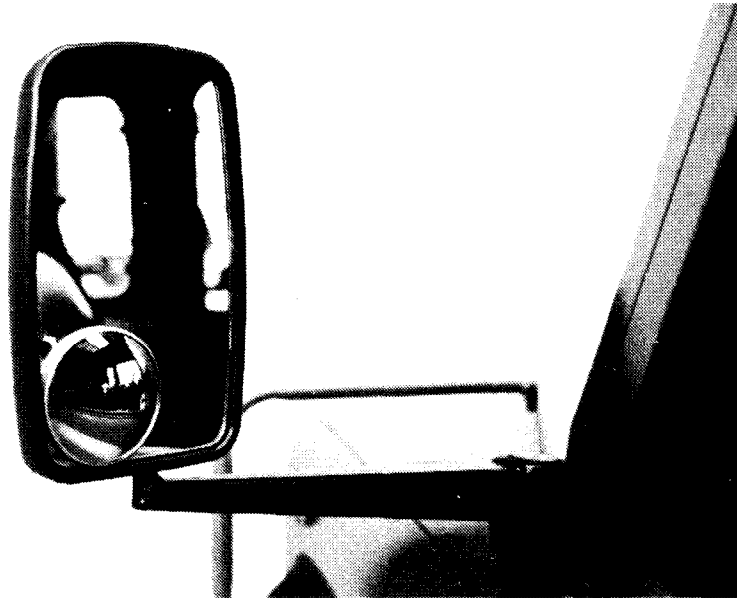


FIG 1 - SPOT MIRROR (LEFT HAND SIDE SHOWN ONLY)

8. Modification Record Plate. Deface the numeral 16 on Truck Utility Lightweight variants and numeral 8 on Truck Light variant modification record plates.

9. Documentation. Details of the modification are to be entered in the TGM 120 Record Book for Service Equipment of all the subject vehicles.

E N D